

SPEC SHEET



FINELINE[®]
high performance cordage

**FINELINE
IS A DSM
LICENSED
PARTNER**

DYNEEMA[®] THE WORLDS STRONGEST FIBRE[™]

**FINELINE WITH
FRANK RACING'S GC32**





CONTENTS

/ Material Properties	4
/ Colour options	5
/ Quick comparison chart	5
/ Break loads	6
/ Material codes	6

GENERAL

/ Braids	8
/ Marine	9

YACHTING

/ Dingy & Windsurf	10
/ Cruising	12
/ High performance	13
/ Xtreme performance	15
/ Cores - performance	17
/ Charts/accessories	19
/ Sleeving	18
/ Finline Cables	20

MATERIAL PROPERTIES

DYNEEMA® THE WORLDS STRONGEST FIBRE™

Specific Gravity - .97 Melt Point - 144-152° Tenacity - 30gpd

Dyneema® Fibre is one of the more common high performance fibres available on the market. Its high strength and low elongation and light weight make it the ideal braid for sheets, guys and control lines. It has excellent chemical resistance and UV resistance, although it tends to have a cover over the dyneema core, generally polyester, to increase its working life. The Dyneema® SK75, SK78, DM20 and SK90 yarn is the strongest fibre in our current range. Negatives in using Dyneema are the slippery nature of the fibre and the tendency to creep, i.e. Elongation under a prolonged load. Creep is much lower in SK78 and almost non existent in DM20.

VECTRAN™

Specific Gravity 1.41 Melt Point - 330° Tenacity - 23gpd

Vectran™ is a high performance fibre that is specifically designed for fixed load applications. It has a very high melting point and can withstand extreme temperatures, its high strength, low elongation and very low creep makes it ideal for Halyards. It has excellent cut resistance and has low moisture absorption. Its UV stability is poor, however its abrasion and cut resistance is much superior to polyester and it is used in extreme performance yacht braid covers

DYNICE™

Specific Gravity Melt Point -144°-152°

Dynice™ is a urethane coated heat set Dyneema or Spectra core and can come in a variety of urethane colours. With the urethane coating Dynice™ has excellent U.V, abrasion resistance and very low elongation. It has excellent tension and bending fatigue surpassing that of steel at common working loads. Its high strength and low weight make it suitable for ropes used in yachting applications halyards, sheets or any other application where a high performance rope is needed. It is often used with an outer cover, normally polyester, to extend its working life. Although it is heat set, it does still creep under extended load.

POLYESTER (TERYLENE,DACRON)

Specific Gravity - 1.38 Melt Point - 260°c Tenacity - 8.5gpd

Polyester is the most commonly used material in our range. It is also available in a wide range of colours and weights, the most common weights are 250, 500, 1000 & 1500 denier. It is resistant to U/V rays and all colours are colourfast. Prolonged exposure in water has little or no lasting effects. It has good abrasion resistance, especially when twisted. However it can not be dyed using normal dyeing methods. It has low stretch and used in all 5 & 6 series, sash cords, luff cords, HJ series and yacht braids; it is suitable for Halyards, Sheets, Reefing lines and control lines on cruising boats.

POLYPROPYLENE

Specific Gravity - .91 Melt Point - 165° Tenacity - 7.8gpd

Polypropylene is a light weight material that is used throughout the marine industry for rescue lines and anything else that requires a light weight floating rope. Its abrasion resistance is not equal to polyester and other yarns but it is U/V stabilised. It has excellent chemical resistance and does not retain water. It is good as a multipurpose rope but loses strength under heavy shock loads, it can be used for rescue lines and other general purpose uses.

NYLON (POLYAMIDE)

Specific Gravity - 1.14 Melt Point - 250° Tenacity - 8.9gpd

Nylon has a higher strength than polyester but also has more elongation. It tends to be used for fixed applications such as mooring lines or sea anchors. It has excellent abrasion resistance but tends to harden as the rope gets more worn. It can also be dyed using acid dyes.

TECHNORA (ARAMID)







Technora is a aramid fibre in the same family as kevlar. It is however more flexible, available undyed with a marine finish to improve abrasion resistance or matt black to improve UV resistance.

KEVLAR (ARAMID)

Specific Gravity -1.44 Melt Point -Chars at +450°

The original high tech fibre, it has exceptional strength for a low weight fibre that can be up to 5 times stronger than steel on an equal weight basis. Kevlar is extremely heat resistant and has exceptional cut resistance; it is used in bullet proof vests for this reason. It is unaffected by water and is also used in the construction of mooring lines and elevator cables. It has little creep and low elongation and is best kept away from alkaline conditions or exposed to chlorine. The main negatives is poor point loading and poor U.V resistance.

COLOUR OPTIONS



BREAK LOAD COMPARISON CHART

Diameter	Classic	Dock line	Advantage	Premier	Dynice 75	Dynice DUX
2			240	200		
3			300	330	1000	
4	250		600	650	2000	
5	400		850	1000	3500	4800
6	850		1500	1700	4200	6800
7						7500
8	1650		2800	3500	6700	
9						10900
10	2500		4400	5000	10700	13500
11						16600
12	3000	2800	5400	6500	16400	
13						22800
14	4800	4200	8200	9000	21800	
16	6400	6000	9000	10500	27500	37200
18	7000	6500	10000	12000	35000	45100
20	7200	7500	11000	13000	41900	54700
22	7400			16000	50000	
24		8200			57800	

COLOUR EXAMPLES SHOWN AS A BASIC GUIDE ONLY

BREAK LOADS

Break loads have been achieved in laboratory conditions. Break loads of Advantage, Premier, FX & V Series have been achieved using long splices at both ends.

Because of the large amounts of ropes and working applications it is not possible to make absolute recommendations.

In general for non critical applications nominal work loads of 10-20% is considered acceptable.

Critical applications would require professional analysis of all conditions.

PATTERN OPTIONS



FLECK (4)



SNAKE SKIN



MOTTLED

MATERIAL CODES

All products are coded with the construction/material makeup followed by the finished diameter size. (Excluding sash cord).

Y	Yacht braid construction	N	Nylon
C	Basic braid construction	V	Vectran [®] is a registered trade mark of Kuraray America Ltd.
R	Recovery - Factory overbraiding existing cores	T	Technora [®] is a registered trade mark of Teijin BV.
RRJ	Replacement cover with internal mouse line	X	Dynice 75 [®] is a registered trade mark of Hampidjan.
D	Dyneema [®] is a registered trade mark of Royal DSM N.V.	XS	Dynice DUX 75 [®] is a registered trade mark of Hampidjan.
J	Polyester	A	Kevlar [®] is a registered trade mark of Du Point USA.
P	Polypropylene	O	PBO Zylon [®] is a registered trade mark of Toyobo Co.
BK	Spun Polyester	FX	Utherane coated Dyneema

EXAMPLE **YJTD12**

Y = Yacht braid construction

D = Dyneema core

JT = Polyester & Technora Blend

= 12.0mm diameter



GENERAL

BRAIDS / MARINE

GENERAL BRAIDS

5 SERIES




Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CJ505	0.5 mm	100/1000m	10	0.33
CJ510	1 mm	100/1000m	35	0.10
CJ515	1.5 mm	100/1000m	50	0.16
CJ520	2 mm	100/1000m	100	0.27
CJ525	2.5 mm	100/1000m	130	0.42
CJ530	3 mm	100/300m	200	0.60
CJ535	3.5 mm	100/500m	350	0.81
CJ540	4 mm	100/300m	390	1.13
CJ545	4 mm	100/400m	425	1.28
CJ550	5 mm	100/300m	565	1.57
CJ560	6 mm	100/200m	600	2.36

POLYESTER

8 Plait construction, high tenacity UV stabilised polyester core and cover. Solid white, black and colours.

Applications - General purpose, tying and whipping, Lacing cord, Blind draw cord, mouse line, leech line.

6 SERIES

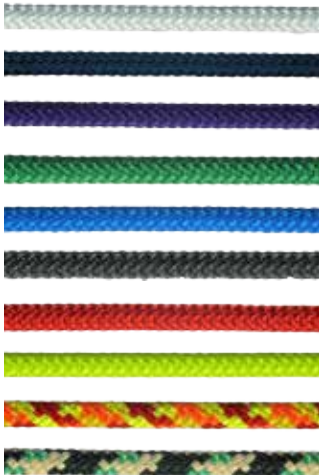

Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CJ610	1 mm	100/1000m	25	0.63
CJ615	1.5 mm	100/1000m	50	0.16
CJ620	2 mm	100/1000m	75	0.27
CJ623	2.3 mm	100/1000m	123	0.36
CJ625	2.5 mm	100/1000m	200	0.49
CJ630	3 mm	100/500m	240	0.63
CJ635	3.5 mm	100/500m	275	0.80
CJ640	4 mm	100/300m	400	1.34
CJ645	4.5 mm	100/300m	425	1.41
CJ650	5 mm	100/300m	520	1.83
CJ660	6 mm	100/200m	650	2.40

POLYESTER

16 Carrier smooth construction, high tenacity UV stabilised polyester core and cover. Solid white, black and colours.

Applications - General purpose, tying and whipping, mouse line, Blind draw cord, leech line.

SASH CORD



Product	Size	Spool	Weight /100mts (kg)
No.3 HL	3 mm	150m	0.57
No.4 HL	3.5 mm	150m	0.72
No.5	4 mm	150m	1.20
No.5 HL	4 mm	150m	1.21
No.6	6 mm	150m	2.50
No.7	6.4 mm	150m	2.84
No.8	7 mm	150m	3.27
No.9	7.8 mm	150m	4.11
No.10	9 mm	100m	5.31

POLYESTER

Solid braid construction high tenacity UV polyester, excellent general purpose braid available in solid black and white. Not suitable for high loads., Although excellent for Sash Windows.

Easy for knotting and unknitting.

Applications - Window sash cord, motor starter cord.

DOCKLINE



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
YN10	10mm	100m	2000	6.00
YN12	12mm	100m	2800	9.05
YN14	14mm	100m	4200	12.5
YN16	16mm	100m	6000	15.3
YN18	18mm	100m	6500	20.0
YN20	20mm	100m	7500	22.0
YN24	24mm	100m	8200	32.4

NYLON

100% UV Stabilized nylon, black outer cover, high elongation, easy to splice and handle. Available in cut lengths on request for larger sizes.

* Tested with both ends spliced

Applications - Mooring, Anchoring, Docking.

LITE LINE



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
YP6	6mm	100m	550	2.00
YP8	8mm	100m	750	3.60
YP10	10mm	100m	1200	5.20
YP12	12mm	100m	1500	6.80

POLYPROPYLENE

100% multi filament polypropylene. Floating rope. Same construction as classic yacht braid. Not suitable for shock loading.

Applications - Lite tow line, general purpose sailing dingy line.

LUFF CORD



Product	Size	Spool	Weight /100mts (kg)
CJ632HL	3.2mm	500m	0.76
CJ640HL	4mm	300m	1.21
CJ648HL	4.8mm	300m	1.73
CJ657HL	5.7mm	300m	2.65
CJ664HL	6.4mm	300m	2.98
CJ680HL	8mm	200m	4.90
CJ910HL	10mm	200	7.00
CJ913HL	13mm	100m	

POLYESTER

Tightly picked 100% polyester braid, extremely rigid for use in sail making luff cord.

Special sizes made to order.

HJ SERIES



Product	Size	Spool	Weight /100mts (kg)
HJ8	8mm	100m	2.44
HJ10	10mm	100m	3.19
HJ12	12mm	100m	5.27
HJ14	14mm	100m	7.30
HJ20	20mm	100m	12.0

POLYESTER

Braided high tenacity UV stabilised polyester without a core, perfect for horse/dog leads etc, and a low cost winch braid. White and colours on request. Easy to splice.

Applications - Dog, horse leads, Inflatable boat soft grip handles. Light load winch rope and Fender lines.

HAURAKI FENDERS



Product	Size (mm)	Weight (kg)
HFS	300 x 800	1.7
HFM	350 x 1000	2.5
HFL	400 x 1200	3.1

FENDERS

Fenders big enough to protect your boat properly, and small enough to stow away easily.

Constructed from light grey, heavy duty, 1.2mm thick PVC fabric.

The seams are heat welded together with doubler tapes in a controlled environment to ensure a strong, high quality join is achieved.

PETER BURLING

MOTH WORLD
CHAMPION
OLYMPIC GOLD
MEDALIST

DINGHY & WINDSURF

CONTROL 2.0



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
YPDD4	4mm	100	600	.86
YPDD5	5mm	100	850	1.45
YPDD6	6mm	100	1500	1.7

DINGY LINES

Designed with input from Peter Burling. High Strength dyneema core with lightweight dyneema polypropylene cover.

Ideal for kite sheets.

WINDSURF



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CJV620	2mm	100m	200	0.37
CJV630	3mm	100m	330	.66
YJV4	4mm	100m	650	1.3
YJV5	5mm	100m	1000	2.00
YJV6	6mm	100m	1700	2.9

WINDSURF LINES

High strength low stretch vectran core. Tough polyester cover.

Applications - Downhaul, Halyards.

SOFTLINE



Product	Size	Spool	Approx B/Load (kg)
SL6	6mm	100	600
SL8	8mm	100	900
SL10	10mm	100	1100

A blend of Spun polypropylene over a braided polyester core.

Cleats well, Ideally suited for hand held control lines.

YACHTING

CRUISING / HIGH PERFORMANCE / XTREME PERFORMANCE

YACHTING - CRUISING

CLASSIC

Solid Colour




Break loads shown are SPLICED breaks

Product	Size	Spool	Approx Spliced B/Load (kg)	Weight /100mts (kg)
YJ4	4mm	100m *	250	1.16
YJ5	5mm	100m	400	1.60
YJ6	6mm	100m *	850	2.77
YJ8	8mm	100m *	1650	4.97
YJ10	10mm	100m *	2500	7.75
YJ12	12mm	100m *	3000	10.3
YJ14	14mm	100m *	4800	15.3
YJ16	16mm	100m *	6400	18.1
YJ18	18mm	100m	7000	23.6
YJ20	20mm	100m	7200	25.8
YJ22	22mm	100m	7400	29.2

YACHT BRAIDS

Fleck

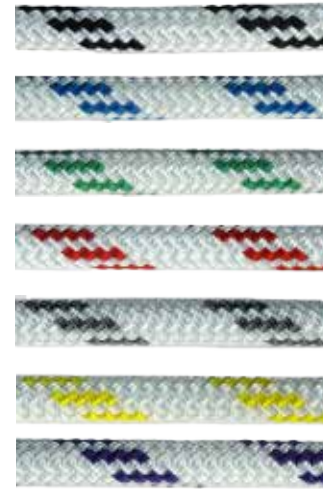


Designed for the cruiser/racer, FINELINE™ polyester double braids are constructed using 100% high tenacity multifilament polyester yarn. High strength with low stretch, softer construction for ease of splicing, new easy identification 4 fleck colour coding, excellent UV and chemical resistance,

Applications - Sheets, halyards, down hauls, runners, reefing line and spinnaker guys.

* Also available in bulk 200 - 400mtrs, 4 - 12mm up to 400mtrs, 14 - 16mm up to 200 mtrs

TRADITIONAL



Break loads shown are SPLICED breaks

Product	Size	Spool	Approx Spliced B/Load (kg)	Weight /100mts (kg)
YJ4	4mm	100m *	250	1.16
YJ5	5mm	100m	400	1.60
YJ6	6mm	100m *	850	2.77
YJ8	8mm	100m *	1650	4.97
YJ10	10mm	100m *	2500	7.75
YJ12	12mm	100m *	3000	10.3
YJ14	14mm	100m *	4800	15.3
YJ16	16mm	100m *	6400	18.1
YJ18	18mm	100m	7000	23.6
YJ20	20mm	100m	7200	25.8
YJ22	22mm	100m	7400	29.2

YACHT BRAIDS

Designed for Classic boats, FINELINE™ “Traditional” is an alternative colour to white.

The cover is also available in all Fineline ranges in solid colour or with colour fleck.

* Lower levels held of stock, manufactured to order.

Bulk reels available

Applications - Sheets, halyards, down hauls, runners, reefing line and spinnaker guys.



YACHTING - HIGH PERFORMANCE

ADVANTAGE



+ FLURO YELLOW

Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CJD620	2mm	100m	240	0.36
CJD630	3mm	100m	300	0.60
YJD4	4mm	100m	600	1.2
YJD5	5mm	100m	850	1.6
YJD6	6mm	100m*	1500	2.7
YJD8	8mm	100m*	2800	4.65
YJD10	10mm	100m *	4400	6.8
YJD12	12mm	100m *	5400	9.5
YJD14	14mm	100m *	8200	13.5
YJD16	16mm	100m *	9000	15.5
YJD18	18mm	100m *	10000	21.5
YJD20	20mm	100m *	11000	23.2
YJD22	22mm	100m *	11800	26.0

Break loads shown are SPLICED breaks

DYNEEMA® SK78 FIBRE CORE - POLY COVER

High performance Dyneema® Fibre SK78 HDPE core and 100% high tenacity polyester cover. Double braid construction with high strength and low stretch. Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection.

12 Carrier core - 24 Carrier cover.

• Available in traditional colour

Applications - Halyards, Sheets, Control Lines, Vang, Reefing and furling systems, Out/downhaul.

ADVANTAGE / TECH 2 X BLEND OPTIONS



GRAND PRIX (GP)



PRO

Code	Size	Approx Spliced B/Load (kg)	PRO TECHNORA / POLY Approx %	GRAND PRIX TECHNORA / POLY Approx %
YJTD6	6mm	1500	Not available	75/ 25
YJTD8	8mm	2800	Not available	75/25
YJTD10	10mm	4400	50/50	80/20
YJTD12	12mm	5400	55/45	75/25
YJTD14	14mm	8200	50/50	80/20
YJTD16	16mm	9000	50/50	75/25
YJTD18	18mm	10000	50/50	75/25
YJTD20	20mm	11000	50/50	75/25

Break loads shown are SPLICED breaks

Technora®



Dyneema SK78 Core with UV stabilized Polyester and Technora blend cover.

Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection. For extreme load applications, Technora's high melt point of >500 degree's ensures longer life than standard polyester.

ADVANTAGE / VECT 2 X BLEND OPTIONS



GRAND PRIX (GP)



PRO

Code	Size	Approx Spliced B/Load (kg)	PRO TECHNORA / POLY Approx %	GRAND PRIX TECHNORA / POLY Approx %
YJVD6	6mm	1500	Not available	75/ 25
YJVD8	8mm	2800	Not available	75/25
YJVD10	10mm	4400	50/50	80/20
YJVD12	12mm	5400	55/45	75/25
YJVD14	14mm	8200	50/50	80/20
YJVD16	16mm	9000	50/50	75/25
YJVD18	18mm	10000	50/50	75/25
YJVD20	20mm	11000	50/50	75/25

Break loads shown are SPLICED breaks

Vectran®



Dyneema SK78 Core with UV stabilized Polyester and vectran blend cover.

Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection. For extreme load applications, Vectran's high melt point of >330 degree's ensures longer life than standard polyester.

YACHTING - HIGH PERFORMANCE

PREMIER *Vectran*



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CJV620	2mm	100m	200	0.37
CJV630	3mm	100m	330	.66
YJV4	4mm	100m	650	1.3
YJV5	5mm	100m	1000	2.00
YJV6	6mm	100m	1700	2.9
YJV8	8mm	100m	3500	5.0
YJV10	10mm	100m	5000	7.6
YJV12	12mm	100m	6500	10.5
YJV14	14mm	100m	9000	15.5
YJV16	16mm	100m	10500	19.2
YJV18	18mm	100m	12000	23.6
YJV20	20mm	100m	13000	25.8
YJV22	22mm	100m	16000	27.9

Break loads shown are SPLICED breaks

VECTRAN® CORE - POLY COVER

Designed for the performance racer,


FINELINE™ Premier uses a liquid crystal polymer Vectran® core and 100% polyester high tenacity cover.

Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection.

Features • 16 Carrier Vectran® core
• 24 Carrier 100% high tenacity polyester.

Applications - Low stretch and zero creep make vectran ideal for halyards and other sized load applications.

PREMIER / TECH 2 X BLEND OPTIONS



GRAND PRIX (GP)



PRO

Code	Size	Approx Spliced B/Load (kg)	PRO TECHNORA / POLY Approx %	GRAND PRIX TECHNORA / POLY Approx %
YJTV6	6mm	1700	Not available	75/ 25
YJTV8	8mm	3500	Not available	75/25
YJTV10	10mm	5000	50/50	80/20
YJTV12	12mm	6500	55/45	75/25
YJTV14	14mm	9000	50/50	80/20
YJTV16	16mm	10500	50/50	75/25
YJTV18	18mm	12000	50/50	75/25
YJTV20	20mm	13000	50/50	75/25


Break loads shown are SPLICED breaks

Technora® *Vectran*

Vectran Core with UV stabilized Polyester and Technora blend cover.

Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection. For extreme load applications, Technora's high melt point of >500 degree's ensures longer life than standard polyester.

PREMIER / VECT 2 X BLEND OPTIONS



GRAND PRIX (GP)



PRO

Code	Size	Approx Spliced B/Load (kg)	PRO VECTRAN / POLY Approx %	GRAND PRIX VECTRAN / POLY Approx %
YJVV6	6mm	1700	Not available	75/ 25
YJVV8	8mm	3500	Not available	75/25
YJVV10	10mm	5000	50/50	80/20
YJVV12	12mm	6500	55/45	75/25
YJVV14	14mm	9000	50/50	80/20
YJVV16	16mm	10500	50/50	75/25
YJVV18	18mm	12000	50/50	75/25
YJVV20	20mm	13000	50/50	75/25

Break loads shown are SPLICED breaks

Vectran®

Vectran Core with UV stabilized Polyester and Vectran blend cover.

Option to coat the core with a urethane coating which includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection. For extreme load applications, Vectran's high melt point of >330 degree's ensures longer life than standard polyester.

YACHTING - XTREME PERFORMANCE

HIGH PERFORMANCE



COVERS



CORE – DYNICE 75

Code	Internal Diameter Core (mm)	External Diameter (mm)	Approx B/Load (Ton)
YJX3	3.0mm	4.7	1.0
YJX4	4.0mm	6	2.0
YJX5	5.0mm	7.5	3.5
YJX6	6.0mm	8.8	4.2
YJX8	8.0mm	12	6.7
YJX10	10.0mm	15	10.7
YJX12	12.0mm	17.3	16.4
YJX14	14.0mm	20	21.8
YJX16	16.0mm	22.3	27.4

POLYESTER COVER DYNICE CORE

Polyester cover - Choice of solid colour or fleck.

UV Stabilized.

Choice of Dynice 75 or Dynice DUX 75 core

NOTE Non Stock item - lower strength by 10% if spliced. Larger diameter on request.

* See performance cores for Dynice specs

XTREME PERFORMANCE / TECH



GRAND PRIX (GP)



PRO



CORE

Code	Internal Diameter Core (mm)	External Diameter (mm)	Approx B/Load (Ton)	PRO TECH / POLY	GRAND PRIX TECH / POLY
YJTX3	3mm	4.7	1.0	N/A	75/25
YJTX4	4mm	6	2.0	N/A	80/20
YJTX5	5mm	7.5	3.5	N/A	75/25
YJTX6	6mm	8.8	4.2	N/A	75/25
YJTX8	8mm	12	6.7	50/50	80/20
YJTX10	10mm	13.5	10.7	55/45	75/25
YJTX12	12mm	17.3	16.4	55/45	75/25
YJTX14	14mm	20	21.8	50/50	75/25
YJTX16	16mm	22.3	27.4	50/50	80/20

Technora® BLEND COVER DYNICE CORE

For extreme load applications, Technora's high melt point of >500 degree's ensures longer life than standard polyester.

Two different blend options ensures the right mix for your application.

NOTE Non Stock item - lower strength by 10% if spliced. Larger diameter on request.

* See performance cores for Dynice specs

XTREME PERFORMANCE / VECT



GRAND PRIX (GP)



PRO



CORE

Code	Internal Diameter Core (mm)	External Diameter (mm)	Approx B/Load (Ton)	PRO TECH / POLY	GRAND PRIX TECH / POLY
YJVX3	3mm	4.7	1.0	N/A	75/25
YJVX4	4mm	6	2.0	N/A	80/20
YJVX5	5mm	7.5	3.5	N/A	75/25
YJVX6	6mm	8.8	4.2	N/A	75/25
YJVX8	8mm	12	6.7	50/50	80/20
YJVX10	10mm	15	10.7	55/45	75/25
YJVX12	12mm	17.3	16.4	55/45	75/25
YJVX14	14mm	20	21.8	50/50	75/25
YJVX16	16mm	22.3	27.4	50/50	80/20

BLEND COVER DYNICE CORE

For extreme load applications, Vectran's high melt point of >280 degree's ensures longer life than standard polyester.

Two different blend options ensures the right mix for your application.

NOTE Non Stock item - lower strength by 10% if spliced. Larger diameter on request.

* See performance cores for Dynice specs

CORES - PERFORMANCE

FX



Product	Diameter (mm)	Approx B/Load (kg)	Weight /100mts (kg)
FX1 (D2)	1	240	.11
FX1.5 (D3)	1.5	300	.17
FX2 (D4)	2	600	.28
FX3 (D5)	3	850	.47
FX4 (D6)	4	1500	.80
FX5 (D7)	5	2000	1.2
FX6 (D8)	6	2800	1.7
FX7 (D10)	7	4400	2.5
FX8.5 (D12)	8.5	5400	3.2

Break loads shown are SPLICED breaks

DYNEEMA® FIBRE CORE ONLY

12 carrier Dyneema SK78 braided core without cover.

Colour coated core that includes Titanium dioxide particles to help improve cut resistance and abrasion plus increased UV protection.

Applications - For use in sail making and structural systems, winch ropes and lashings.

V SERIES Vectran®



Product	Diameter (mm)	Approx B/Load (kg)	Weight /100mts (kg)
V2	1.5mm	200	.15
V3	2.0mm	330	.23
V4	2.5mm	650	.38
V5	3.5mm	1000	.61
V6	4.5mm	1700	1.0
V8	6.5mm	3500	2.3
V10	8.0mm	5000	3.5
V12	10.0mm	6500	4.6
V14	12.0mm	9000	8.9
V16	14.0mm	10500	9.6
V18	16.0mm	12000	11.2
V20	18.0mm	13500	13.5
V22	20.0mm	16000	15.2

Break loads shown are SPLICED breaks

VECTRAN®

16 carrier Vectran® without cover. For Use in sail making and structural systems where braid is not exposed to UV

Applications - Low stretch and zero creep make vectran ideal for halyards and other sized load applications.

DYNICE

DYNICE

DYNICE DUX



Lower strength by 10% if spliced.
Larger diameter on request.

DYNICE 75
or
DYNICE DUX 75

Code	Diameter (mm)	Approx B/Load (Ton)	Weight /100mts (kg)
X1.7	1.7mm	209(kg)	146g
X2.5	2.5mm	425(kg)	316g
X3	3mm	1.0	.8
X4	4mm	2.0	1.10
X5	5mm	3.5	1.61
X6	6mm	4.2	2.3
X8	8mm	6.7	3.8
X10	10mm	10.7	6.1
X12	12mm	16.4	9.3
X14	14mm	21.8	12.5
X16	16mm	27.4	16

Weight & strength of 12 strand ropes

The ropes are impregnated with Duracoat to improve abrasion resistance and endurance.

Code	Diameter (mm)	Approx B/Load (Ton)	Weight /100mts (kg)
XS7	7mm	7.5	3.75
XS9	9mm	10.9	5.4
XS11	11mm	16.6	8.3
XS13	13mm	22.8	11.2
XS15	15mm	28.8	14.4
XS16	16mm	37.2	18.6

Pre-stretched braided rope with ultra high breaking strength

The Dynice Dux 75 is a new generation of ultra high performance ropes. It is far stronger than Dynice 75 by at least 20% up to 43% in the smaller diameters.

Applications - Halyards, runners, strops, high load purchase systems, Checkstays, Winch lines.

SLEEVING

SLEEVING



Product	Size	Spool	Approx B/Load (kg)	Weight /100mts (kg)
CD706 +	6mm	n/a	n/a	.40
CD708 +	8mm	n/a	n/a	.80
CD710	10mm	n/a	n/a	1.05
CD712	12 mm	n/a	n/a	1.29
CD713 *	12 mm	n/a	n/a	1.24
CD714	14mm	n/a	n/a	1.93
CD715 *	14mm	n/a	n/a	1.88
CD716	16mm	n/a	n/a	2.53
CD717 *	16mm	n/a	n/a	2.33
CD720	20mm	n/a	n/a	3.00
CD725	25mm	n/a	n/a	2.91
CD732	32mm	n/a	n/a	4.40

DYNEEMA® FIBRE

52 Carrier High performance Dyneema® Fibre SK78 HDPE Tubular cover.

* Loose Gearing

+ 32 Carrier

(CD710 Black 32 Carrier)

Cut to length if required.

Applications - Chafe guard protection on spliced ends and high wear areas. Cover for uni stays.

SLEEVING



POLYESTER SLEEVING

Product	Size	Spool	Approx B/Load (kg)
CJ708 +	8mm	n/a	n/a
CJ710	10mm	n/a	n/a
CJ712	12mm	n/a	n/a
CJ713 *	12mm	n/a	n/a
CJ714	14mm	n/a	n/a
CJ715 *	14mm	n/a	n/a
CJ716	16mm	n/a	n/a
CJ717 *	16.0mm	n/a	n/a
CJ725*	25.0mm	n/a	n/a

POLYESTER

52 Carrier 100% polyester UV stabilized.

High twist.

* Loose pick

+ 32 Carrier

Available in Traditional and colours.

Non Stock item.

Applications - Low cost chafe guard.

SLEEVING



MARINE FINISH



MATT BLACK

Product	Size	Spool	Approx B/Load (kg)
CT708 +	8mm	n/a	n/a
CT710 +	10mm	n/a	n/a
CT712	12mm	n/a	n/a
CT713 *	12mm	n/a	n/a
CT714	14mm	n/a	n/a
CT715 *	14mm	n/a	n/a
CT716	16mm	n/a	n/a
CT717 *	16mm	n/a	n/a
CT725*	25.0mm	n/a	n/a

Technora®

52 Carrier Technora sleeving

Heat Resistant

Highly abrasion resistant.

* Loose pick

+ 32 Carrier

Applications - Chafe guard for high temperature applications.

SLEEVING SIZE CHART

Indication only



To Cover Size (mm)	Sleeving Size Code	To Cover Size (mm)	Sleeving Code Code
4.0	CD706-708	14.0	CD715
5.0	CD708	16.0	CD716
6.0	CD708	18.0	CD717-720
8.0	CD710	20.0	CD720
10.0	CD712	22.0	CD725
12.0	CD713	24.0	CD725-732



Vectran

To Cover Code	Sleeving Size Code	To Cover Size (mm)	Sleeving Code Code
D4/V4	CD704	D14/V14	CD713-714
D5/V5	CD704	D16/V16	CD715-716
D6/V6	CD706	D18/V18	CD716-717
D8/V8	CD708-710	D20/V20	CD720
D10/V10	CD710-712	D22/V22	CD725
D12/V12	CD712-713		



DYNICE DYNICE DUX

To Cover Code	Sleeving Size Code	To CoverCode	Sleeving Code Code
X3	CD704	XS5	CD708
X4	CD706	XS7	CD708-710
X5	CD708	XS9	CD710-712
X6	CD710	XS11	CD713
X8	CD712-713	XS13	CD714-715
X10	CD713-714		
X12	CD714-715		

HOT KNIFE



ENGEL HSG-O 220V

The Engel hotknife is a great tool for cutting for rope, webbing, synthetic fabrics and other materials that would unravel when cut with scissors.

The Hotknife is trigger operated and heats up quickly (6-8 Seconds). It also has a light to illuminate the cutting area.

The Type R Blade is replaceable and easy to change.

